


## Drosselventile Typ FT1252/2 für Leitungseinbau rechtwinklig

- P max. 210 bar
- Q max. 60 l / min.

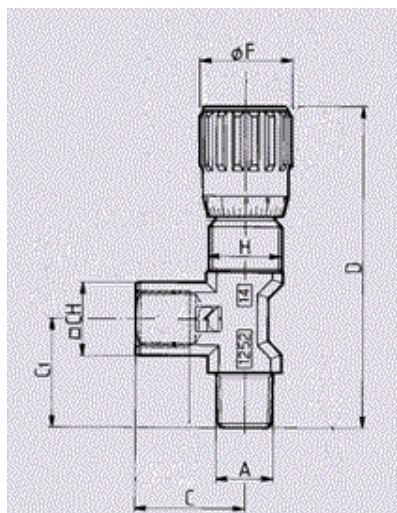

Artikel	Bezeichnung	A	max. Druck bar	max. L/min.	C	C1	D	F	H	CH
250030	FT 1252/2-02-18	1/8 "	210	8	21	21	70	22	M15x1	15
250031	FT 1252/2-02-14	1/4 "	210	12	25	25	74	22	M17x1	17
250032	FT 1252/2-02-38	3/8 "	210	30	29.5	29.5	88	27	M20x1	22
250033	FT 1252/2-02-12	1/2 "	210	60	36	36	105	33	M25x1.5	27